



Features

- 4 RS232 Serial Ports
- COM1-COM4 plus many more
- Interrupts 2-7, 10-12, 14 & 15
- Shared interrupt register allows all ports to share 1 interrupt thus conserving precious PC resources
- 16 Byte fifo on each port
- Sample Programs, Test & Terminal software - all with source code
- Fully moulded cable with Standard 9 or 25 way male 'D' connectors
- Drivers for all popular operating systems
- Guaranteed 100% compatible with the Digiboard PC/4

Specifications

- Ports: 4 x RS232
- UART: 16550
- Baud rates: Up to 115,200
- Data Bits: 5, 6, 7 or 8
- Stop bits: 1 or 2
- Parity: Odd,even, none, mark or space
- Power: 575mA @ 5V
70mA @ 12V
- Weight: 0.17kg
- Size: 10.6 x 16cm

The 16550 UART

16550 UARTs provide a 16 byte input and 16 byte output FIFO hardware buffer for each serial port allowing high data rates without data loss or overrun errors in todays multi-tasking operating systems.

ISA

4 Port RS232

Description




A half size card provides 4 industry standard RS232 serial ports in a single slot. A fully moulded Quad cable terminated in either 9 or 25 pin male 'D' plugs ensures neat & easy connections.

Software

Serial Solutions Device Driver CD contains software for Windows Millennium, Windows 98, Windows 95, Windows NT4, Windows 3.x, DOS and OS/2.

Informative manuals and sample programs are supplied with full source code on CD!

For details of RS232, RS422 or RS485 Standard see:
www.brainboxes.com/standards

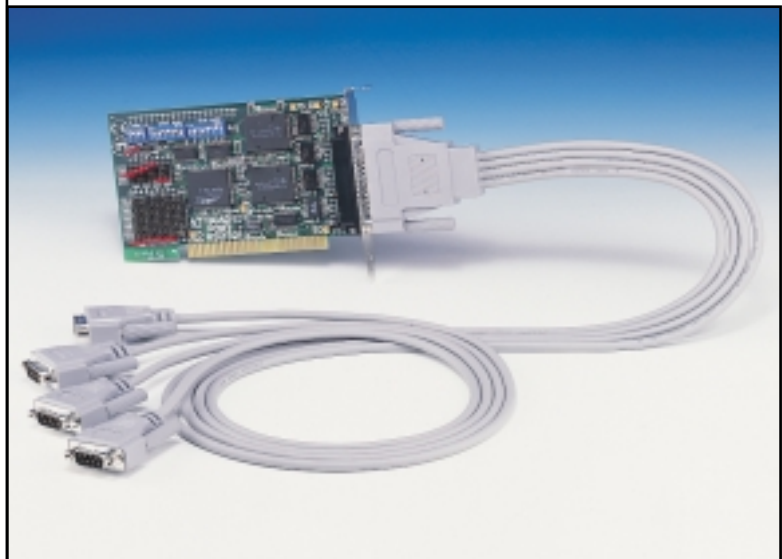

ORDER

| Description | Code |
|------------------------------|--------|
| ISA 4PORT RS232 (4 x 9 pin) | CC-065 |
| ISA 4PORT RS232 (4 x 25 pin) | CC-379 |