


RoHS Compliant

CC-265/ CC-268

PCI QUAD RS232 4X25 PIN

“SERIAL CARDS ENGINEERED TO EXCEED EXPECTATIONS”

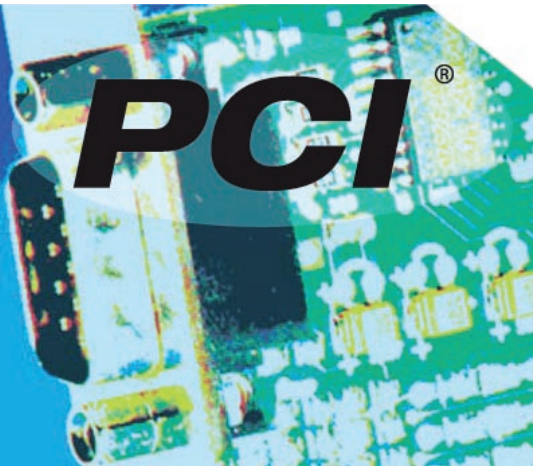

Features

- 4 port RS232
- PCI 2.3
- 16 Byte Tx and 16 Byte Rx FIFOs
- Up to 115,200 Baud
- DB9 connector (9 Pin Male)
- Drivers for all popular operating systems
- Sample Programs, Test & Terminal software
- Lifetime Support
- Lifetime Warranty (registration required)

Options

CC-265:
PCI QUAD RS232 4X25
PIN

CC-268
PCI QUAD RS232 4X9
PIN

Description

This half size card provides 4 industry standard RS232 serial COM ports in a single PCI slot. A fully moulded quad cable terminated in four 25 pin male 'D' plugs ensures neat & easy connections. In a PC with 4 free PCI slots that gives 16 ports! As PCI is fully Plug & Play compatible, the operating system or Bios automatically configures the card ensuring conflict free installation. Serial Solutions Device Driver CD contains software for Windows 7, Server 2008, Vista, Server 2003, XP, 2000, Millennium, 98, 95, NT4, Windows 3.x, DOS and OS/2. Informative manuals and sample programs are supplied with full source code on CD!

Brainboxes range of PCI cards support 5V PCI slots and have been su-


Software

Microsoft signed drivers (easy installation & robust operation) for:

-
-
-
-



As well as: full product documentation, a thorough troubleshooting guide and terminal software. Detailed sample source code for many popular programming languages. Further OS support on next page.



ORDER

Description

PCI QUAD RS232 4X25 PIN
PCI QUAD RS232 4X9 PIN

Code

CC-265
CC-268



PCI QUAD RS232 4X25 PIN

CC-265/ CC-268 Full Specification

<p>Port</p> <table border="1"> <tr><td>Pin 1</td><td>DCD</td></tr> <tr><td>Pin 2</td><td>RXD</td></tr> <tr><td>Pin 3</td><td>TXD</td></tr> <tr><td>Pin 4</td><td>DTR</td></tr> <tr><td>Pin 5</td><td>GND</td></tr> <tr><td>Pin 6</td><td>DSR</td></tr> <tr><td>Pin 7</td><td>RTS</td></tr> <tr><td>Pin 8</td><td>CTS</td></tr> <tr><td>Pin 9</td><td>RI</td></tr> </table> <p>RS232 Pinout (9 Pin Male)</p>	Pin 1	DCD	Pin 2	RXD	Pin 3	TXD	Pin 4	DTR	Pin 5	GND	Pin 6	DSR	Pin 7	RTS	Pin 8	CTS	Pin 9	RI	<p>Ports</p> <p>Connector</p> <p>FIFO size</p> <p>Operating Distance</p> <p>Cable</p>	<p>4 x RS232</p> <p>Connector DB9 -- 9 Pin Male (CC-265) DB25 Connector -- 25 Pin Male (CC-268)</p> <p>16 RX FIFO + 16 TX FIFO</p> <p>EIA - RS232 Standard</p> <p>44 way D to: 4 x DB25</p>
Pin 1	DCD																			
Pin 2	RXD																			
Pin 3	TXD																			
Pin 4	DTR																			
Pin 5	GND																			
Pin 6	DSR																			
Pin 7	RTS																			
Pin 8	CTS																			
Pin 9	RI																			
<p>Port Settings</p> <p>115,200 baud</p>	<p>Baud Rate</p> <p>Data Bits</p> <p>Parity</p> <p>Stop Bits</p> <p>Flow Control</p> <p>Tx/Rx Modes</p>	<p>115,200</p> <p>5,6,7 or 8</p> <p>Odd, Even, None, Mark or Space</p> <p>1 or 2</p> <p>Point to Point</p>																		
<p>Interface</p>	<p>OS Compatibility</p> <p>BUS</p>	<p>Microsoft Windows 7 32 bit & 64 bit Editions Windows Server 2008 32 bit & 64 bit Editions Windows Vista 32 bit & 64 bit Editions Windows Server 2003 32 bit & 64 bit Editions Windows XP 32 bit & 64 bit Editions Microsoft Windows ME Microsoft Windows 2000</p> <p>PCI CC Range : Brainboxes range of PCI cards support 5V PCI slots and have been superseded by Brainboxes uPCI (universal Peripheral Component Interconnect) range. For every card in the CC range there is a matching card in the UC and PX range. If you still have a required for Brainboxes CC cards please get in touch.</p>																		
<p>Approvals</p>	<p>Industry Approvals</p> <p>Microsoft Approvals</p>	<p>Microsoft Certified Gold Partner TAA</p> <p>Windows XP 32 bit & 64 bit editions</p>																		
<p>General</p>	<p>PCB Layers</p> <p>Power Consumption</p> <p>Weight</p> <p>Size</p>	<p>4</p> <p>260mA @ 5V, 30mA @ 12V</p> <p>awaiting (CC-265) 0.089 kg (CC-268)Kg</p> <p>null mm</p>																		
<p>Box Content</p>	<p>Packaging</p> <p>Card</p>	<p>Installation CD including manual, Microsoft signed drivers & utilities</p> <p>PCI QUAD RS232 4X25 PIN</p> <p>44 way D to: 4 x DB25</p>																		
<p>Product Support</p>	<p>Warranty</p> <p>Support</p>	<p>Lifetime (online registration required)</p> <p>Lifetime Web, Email and Phone Support from fully qualified, friendly staff who work in and alongside the Product Development Team</p>																		
<p>Additional</p>	<p>OEM option</p>	<p>Available for bulk buy OEM</p>																		