



# ISA

## 4 Port Photon RS232

### Features

- 4 RS232 Serial Ports
- Interrupts 2-7, 10-12, 14 & 15
- Shared interrupt register allows all ports to share 1 interrupt thus conserving precious PC resources
- Massive 128 Byte FIFO on each port
- Sample Programs, Test & Terminal software - all with source code
- Fully moulded cable with Standard 9 or 25 way male 'D' connectors
- Drivers for all popular operating systems

### Description



A half size card provides 4 industry standard RS232 serial ports in a single slot. A fully moulded Quad cable terminated in either 9 or 25 pin male 'D' plugs ensures neat & easy connections. The fast UART and line drivers give a maximum data rate of 230,400 baud.


### Software

Serial Solutions Device Driver CD contains software for Windows Millennium, Windows 98, Windows 95, Windows NT4, Windows 3.x, DOS and OS/2. Informative manuals and sample programs are supplied with full source code on CD!

For details of RS232, RS422 or RS485 Standard see:  
[www.brainboxes.com/standards](http://www.brainboxes.com/standards)

### Specifications

- Ports: 4 x RS232
- UART: 16950
- Baud rates: Up to 230,400
- Data Bits: 5, 6, 7 or 8
- Stop bits: 1 or 2
- Parity: Odd,even, none, mark or space
- Power: 140mA @ 5V  
40mA @ 12V
- Weight: 0.17kg
- Size: 10 x 13cm

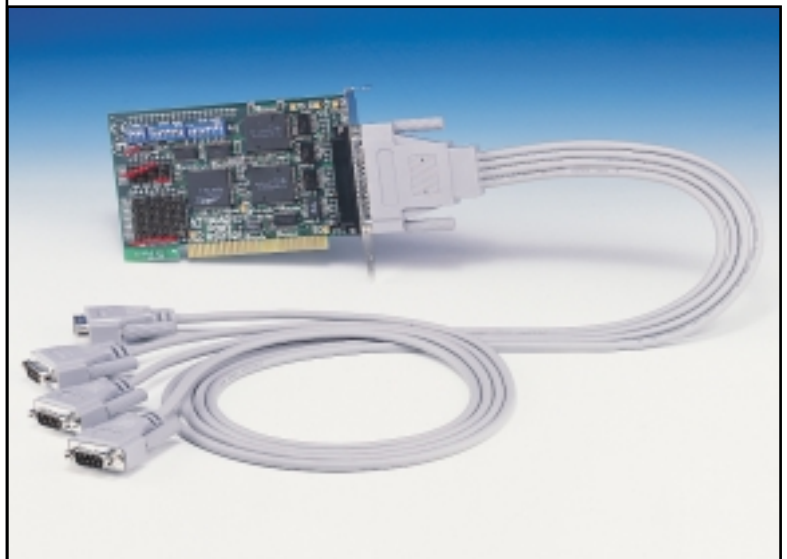

### ORDER

Description	Code
ISA 4PORT PHOTON RS232 (4 x 9 pin)	CC-574
ISA 4PORT PHOTON RS232 (4 x 25 pin)	CC-673